

LEDPRO


LP261000A

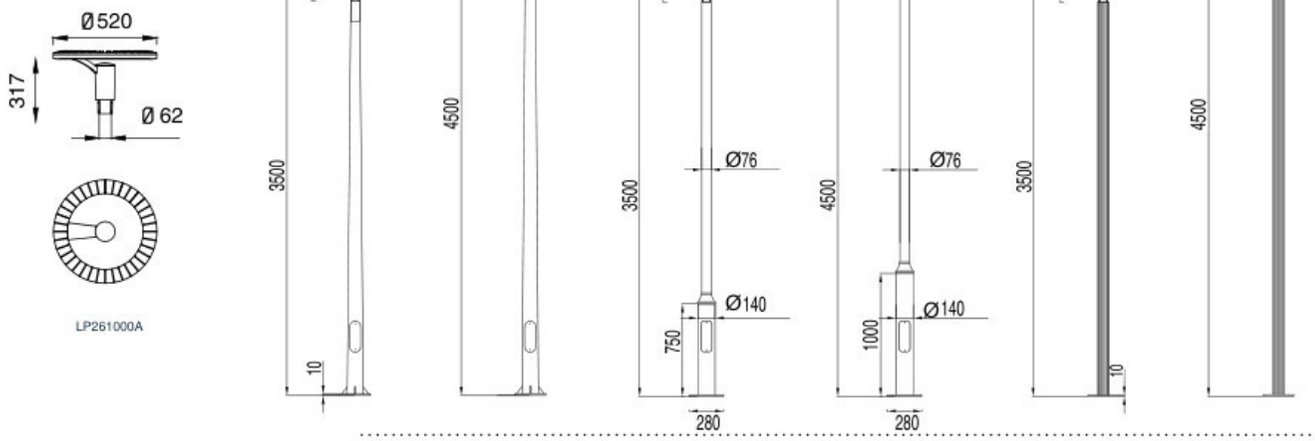

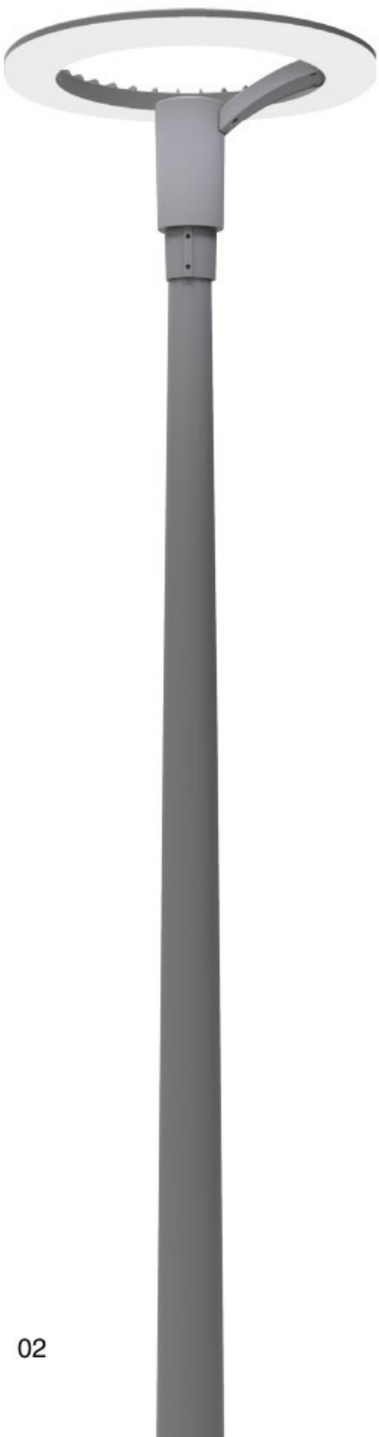


Description:

Die-cast Aluminum housing;









H(m)	Eavg(lx)	Emax(lx)	D(m)
1	287.0	877.9	2.56
2	71.8	219.5	5.13
3	31.9	97.5	7.69
4	17.9	54.9	10.26
5	11.5	35.1	12.83

No: LP261000A-30W LED
MTC LED 30W 2308lm
Opal PC
104.19º
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	413.2	1263.0	2.56
2	103.3	315.7	5.13
3	45.9	140.3	7.70
4	25.8	78.9	10.27
5	16.5	50.5	12.84

No: LP261000A-45W LED
Lumileds LED 45W 3325lm
Opal PC
104.19º
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	558.4	1704.0	2.56
2	139.6	426.0	5.13
3	62.0	189.3	7.70
4	34.9	106.5	10.27
5	22.3	68.2	12.84

No:LP261000A-60W LED
Lumileds LED 60W 4015lm
Opal PC
104.19º
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	626.9	1918.0	2.56
2	156.7	479.6	5.13
3	69.7	213.1	7.69
4	39.2	119.9	10.26
5	25.1	76.7	12.83

No: LP261000A-80W LED
Lumileds LED 80W 5044lm
Opal PC
104.19º
Class I, IP65


LEDPRO

LP261000MA

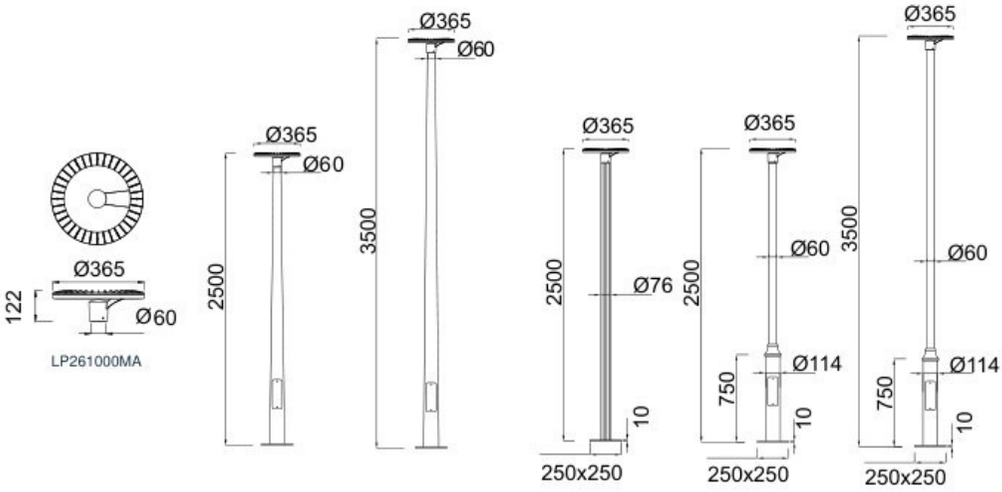

Description:


Die-cast Aluminum housing;



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	138.7	587.4	3.60
2	34.7	146.8	7.20
3	15.4	65.3	10.80
4	8.7	36.7	14.41
5	5.5	23.5	18.01


No: LP261000MA-30W LED
MTC LED 30W 2087lm
Opal PC
120º
Class I, IP65





H(m)	Eavg(lx)	Emax(lx)	D(m)
1	204.9	869.2	3.60
2	51.2	217.3	7.20
3	22.8	96.6	10.80
4	12.8	54.3	14.41
5	8.2	34.8	18.01


No: LP261000MA-45W LED
Lumileds LED 45W 3089lm
Opal PC
120º
Class I, IP65






LEDPRO


LP261000B

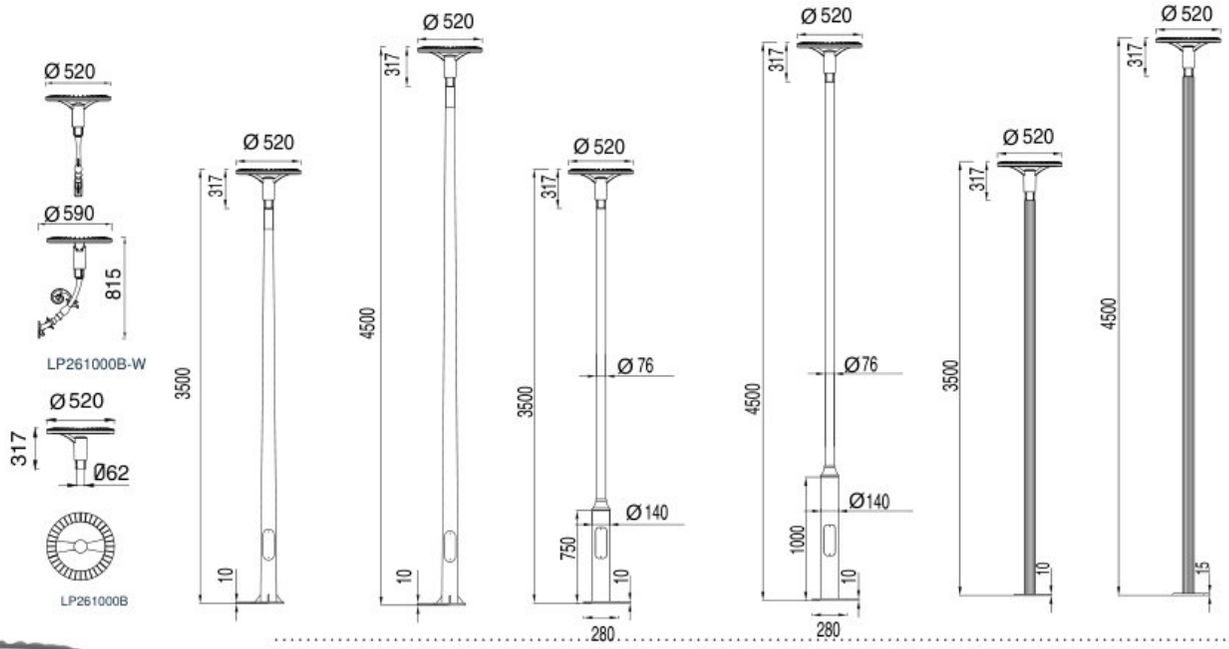


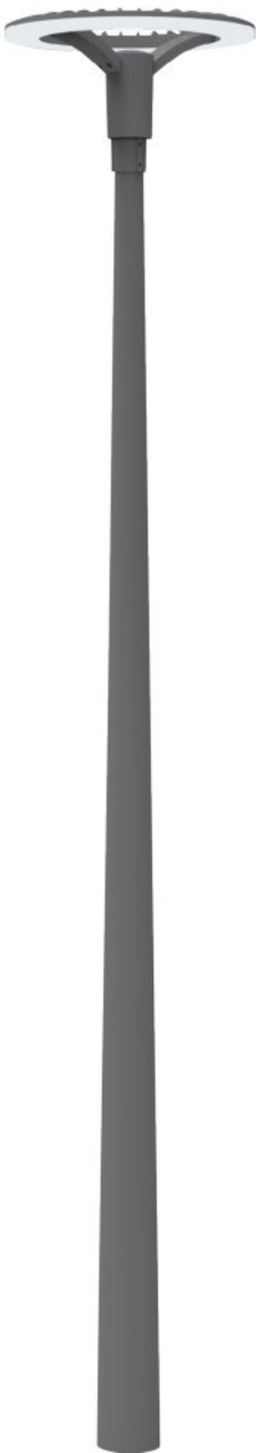

Description:


Die-cast Aluminum housing;

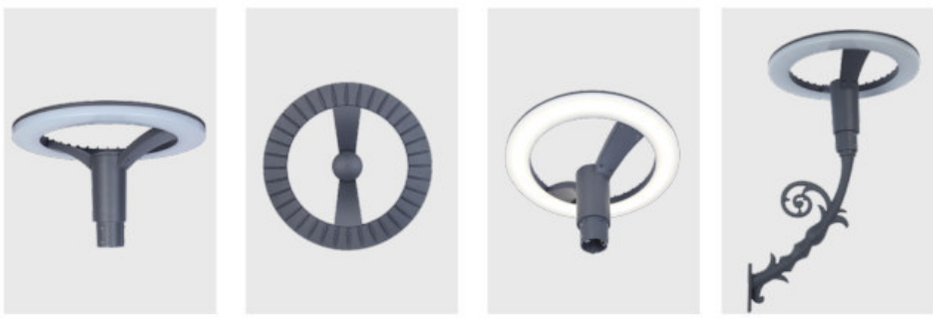




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	287.0	877.9	2.56
2	71.8	219.5	5.13
3	31.9	97.5	7.69
4	17.9	54.9	10.26
5	11.5	35.1	12.83

No: LP261000B-30W LED
MTC LED 30W 2308lm
Opal PC
104.19º
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	413.2	1263.0	2.56
2	103.3	315.7	5.13
3	45.9	140.3	7.70
4	25.8	78.9	10.27
5	16.5	50.5	12.84

No: LP261000B-45W LED
Lumileds LED 45W 3325lm
Opal PC
104.19º
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	558.4	1704.0	2.56
2	139.6	426.0	5.13
3	62.0	189.3	7.70
4	34.9	106.5	10.27
5	22.3	68.2	12.84

No:LP261000B-60W LED
Lumileds LED 60W 4015lm
Opal PC
104.19º
Class I, IP65





H(m)	Eavg(lx)	Emax(lx)	D(m)
1	626.9	1918.0	2.56
2	156.7	479.6	5.13
3	69.7	213.1	7.69
4	39.2	119.9	10.26
5	25.1	76.7	12.83

No: LP261000B-80W LED
Lumileds LED 80W 5044lm
Opal PC
104.19º
Class I, IP65

LEDPRO

LP261000C

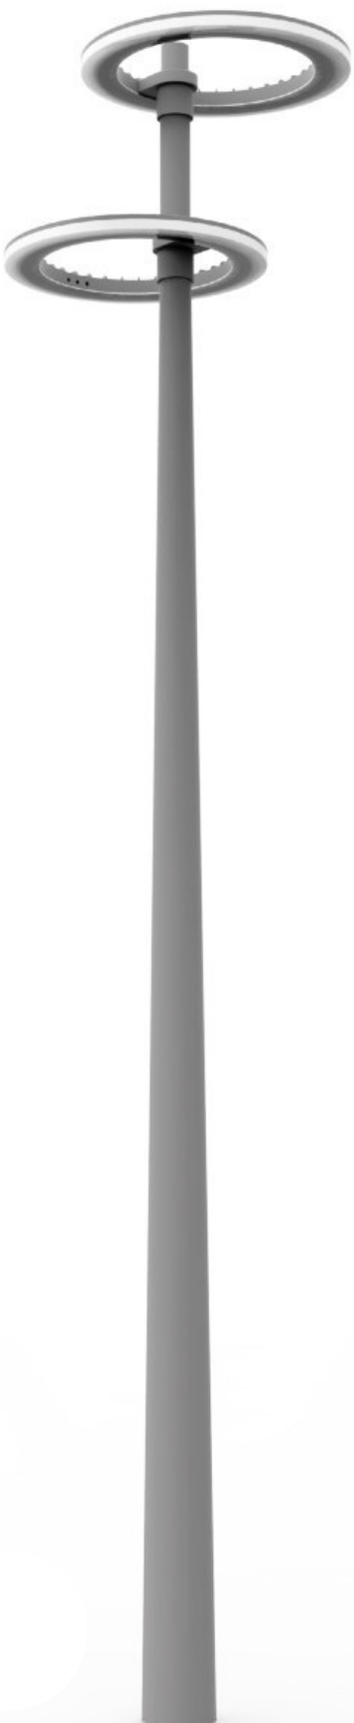

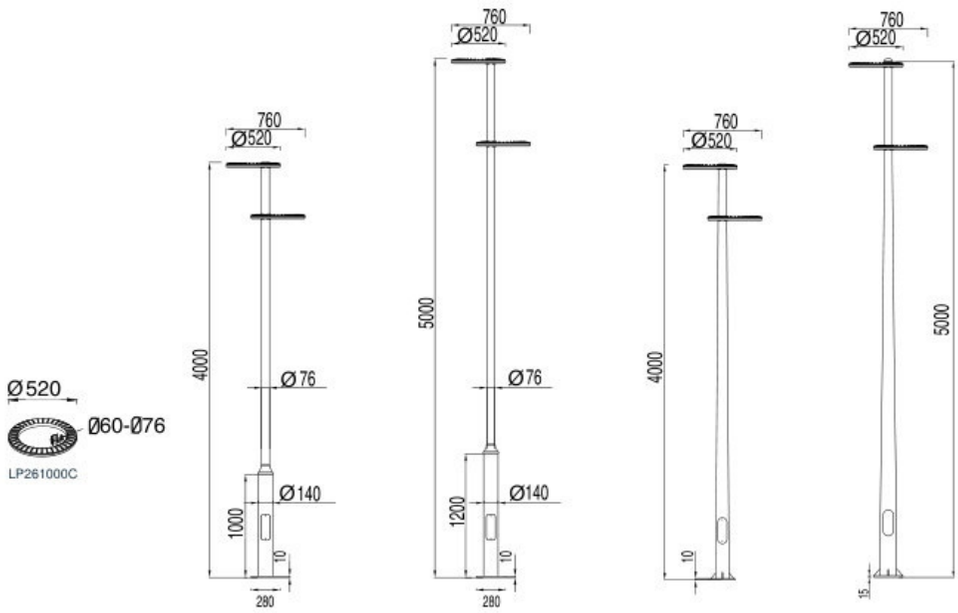


Description:

Die-cast Aluminum housing;









H(m)	Eavg(lx)	Emax(lx)	D(m)
1	287.0	877.9	2.56
2	71.8	219.5	5.13
3	31.9	97.5	7.69
4	17.9	54.9	10.26
5	11.5	35.1	12.83

No: LP261000C-30W LED
MTC LED 30W 2308lm
Opal PC
104.19º
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	413.2	1263.0	2.56
2	103.3	315.7	5.13
3	45.9	140.3	7.70
4	25.8	78.9	10.27
5	16.5	50.5	12.84

No: LP261000C-45W LED
Lumileds LED 45W 3325lm
Opal PC
104.19º
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	558.4	1704.0	2.56
2	139.6	426.0	5.13
3	62.0	189.3	7.70
4	34.9	106.5	10.27
5	22.3	68.2	12.84

No:LP261000C-60W LED
Lumileds LED 60W 4015lm
Opal PC
104.19º
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	626.9	1918.0	2.56
2	156.7	479.6	5.13
3	69.7	213.1	7.69
4	39.2	119.9	10.26
5	25.1	76.7	12.83

No: LP261000C-80W LED
Lumileds LED 80W 5044lm
Opal PC
104.19º
Class I, IP65

LEDPRO

LP261000D

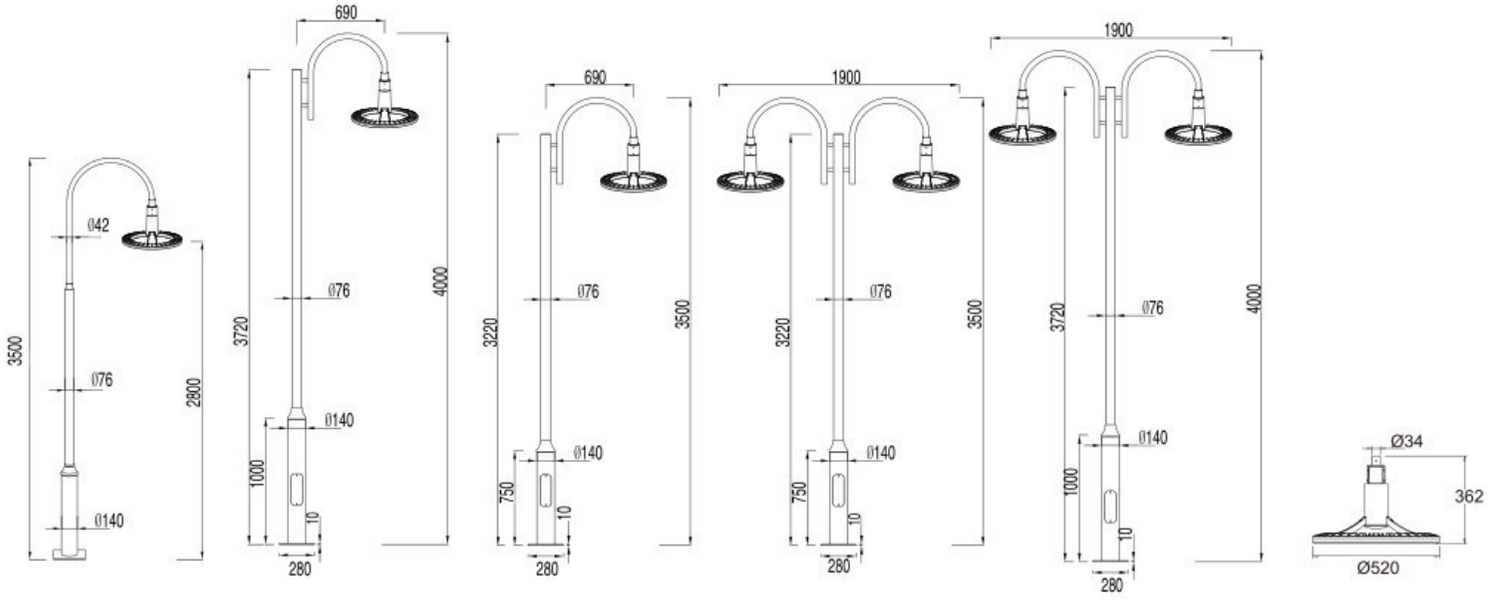

Description:

Die-cast Aluminum housing;





H(m)	Eavg(lx)	Emax(lx)	D(m)
1	287.0	877.9	2.56
2	71.8	219.5	5.13
3	31.9	97.5	7.69
4	17.9	54.9	10.26
5	11.5	35.1	12.83

No: LP261000D-30W LED
MTC LED 30W 2308lm
Opal PC
104.19º
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	413.2	1263.0	2.56
2	103.3	315.7	5.13
3	45.9	140.3	7.70
4	25.8	78.9	10.27
5	16.5	50.5	12.84

No: LP261000D-45W LED
Lumileds LED 45W 3325lm
Opal PC
104.19º
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	558.4	1704.0	2.56
2	139.6	426.0	5.13
3	62.0	189.3	7.70
4	34.9	106.5	10.27
5	22.3	68.2	12.84

No:LP261000D-60W LED
Lumileds LED 60W 4015lm
Opal PC
104.19º
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	626.9	1918.0	2.56
2	156.7	479.6	5.13
3	69.7	213.1	7.69
4	39.2	119.9	10.26
5	25.1	76.7	12.83

No: LP261000D-80W LED
Lumileds LED 80W 5044lm
Opal PC
104.19º
Class I, IP65



LEDPRO

LP261002B2






Description:

Die-cast Aluminum housing;

Extruded Aluminum pole



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	377	635.3	2.00
2	94.2	158.8	4.00
3	41.8	70.6	6.00
4	23.5	39.7	8.00
5	15.1	25.4	10.00


No: LP261002B2-30W LED

Lumileds 30W 2344lm

Clear PC

90º

Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	594	935.2	2.00
2	148.5	233.8	4.00
3	66.0	103.9	6.00
4	37.1	58.5	8.00
5	23.8	37.4	10.00

No: LP261002B2-50W LED

Lumileds 50W 3981lm

Clear PC


90º

Class I, IP65

LEDPRO


LP261042



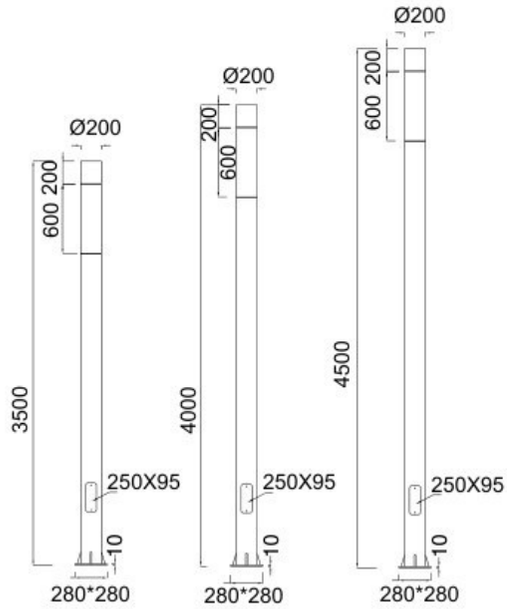


Description:

Sanding-cast Aluminum housing



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	257	434.4	2.00
2	64.3	108.6	4.00
3	28.6	48.3	6.00
4	16.1	27.2	8.00
5	10.3	17.4	10.00

No: LP261042-30W LED
Lumileds LED 30W 2575lm
Clear PC
90º
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	702	1703.0	2.00
2	175.6	425.7	4.00
3	78.0	189.2	6.00
4	43.9	106.4	8.00
5	28.1	68.1	10.00

No: LP261042-45W LED
Lumileds LED 45W 2906lm
Clear PC
90º
Class I, IP65


LEDPRO

LP261054

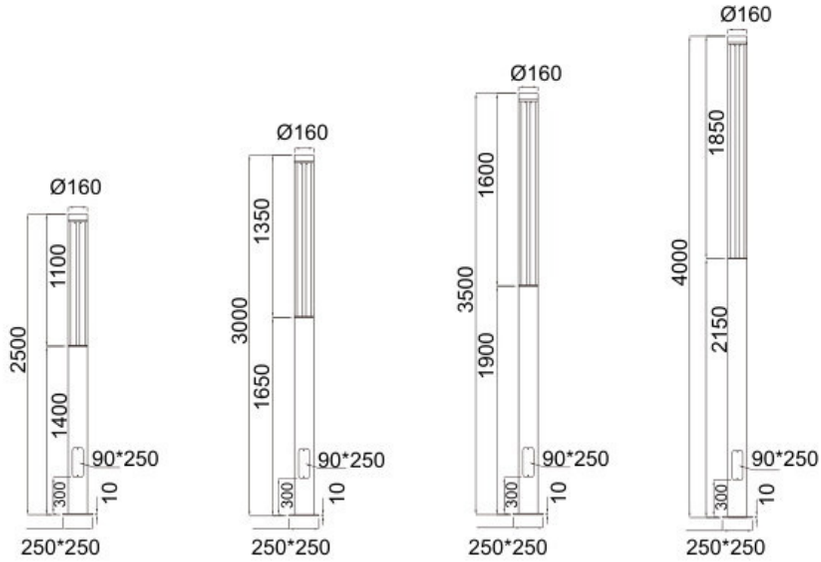

Description:

Extruded Aluminum housing




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	903	1508	0.38
2	225.0	377.0	0.77
3	100.3	167.5	1.16
4	56.4	94.2	1.54
5	36.1	60.3	1.93

No: LP261054-25W LED

CREE LED 25W 1854lm

Clear Glass

Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	775	1631	2.00
2	193.6	407.7	4.00
3	86.1	181.2	6.00
4	48.4	101.9	8.00
5	31.0	65.2	10.00


No: LP261054-45W LED

CREE LED 45W COB 4247lm

Clear Glass

180º


Class I, IP65

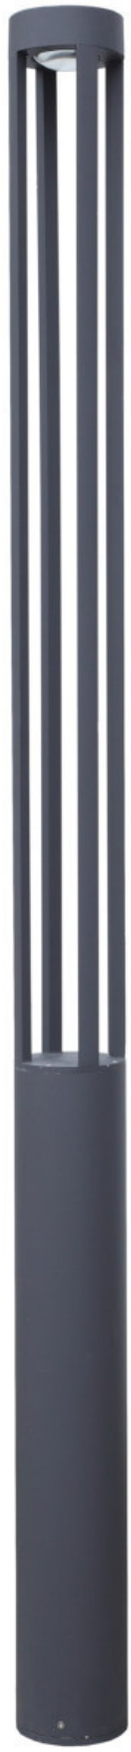

LEDPRO

LP261005



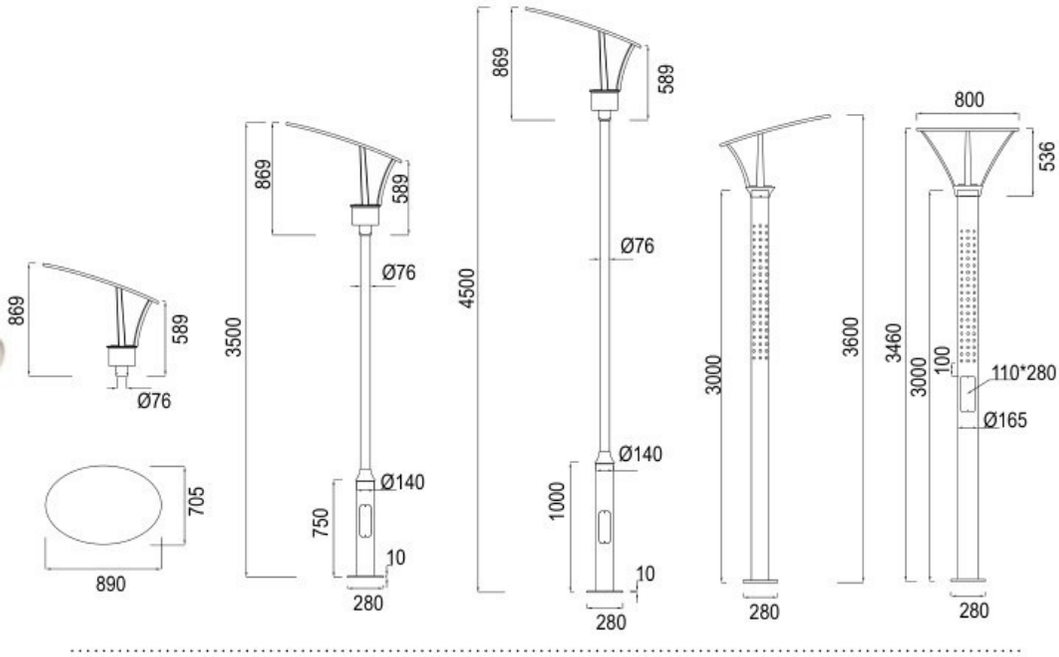

Description:

Die-cast and sanding Aluminum housing

White Polymer plate

in the middle 2*T5 14W LED



No: LP261005-G12

G12, 70W or 150W

Clear Tempered Glass

Class I, IP65

No: LP261005-30W LED

Lumileds LED 30W


Clear Tempered Glass

Class I, IP65

LEDPRO


LP261069



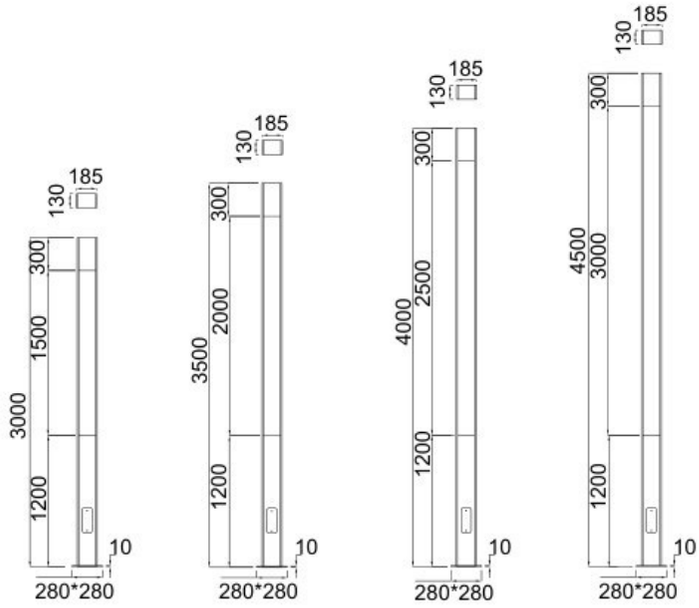

LEDPRO

LP261070

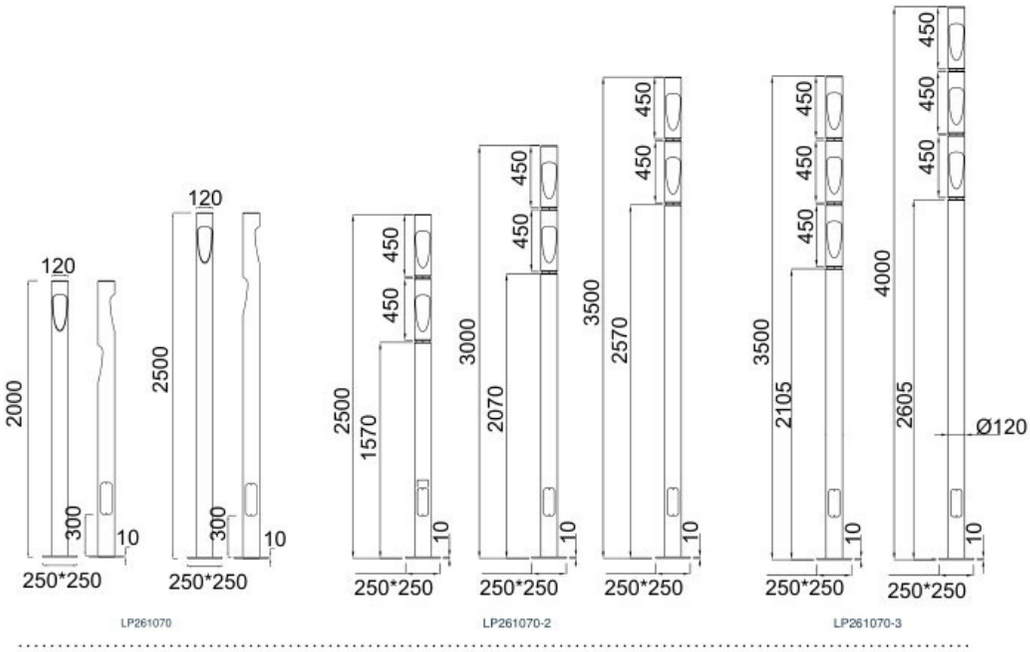

Description:

Extruded Aluminum housing

No: LP261070-20W LED
CREE COB LED 1512 20W
Clear Glass
Class I, IP65

No: LP261070-2 2*20W LED
CREE COB LED 1512 2*20W
Clear Glass
Class I, IP65

No: LP261070-3 3*20W LED
CREE COB LED 1512 3*20W
Clear Glass
Class I, IP65






LEDPRO


LP261071



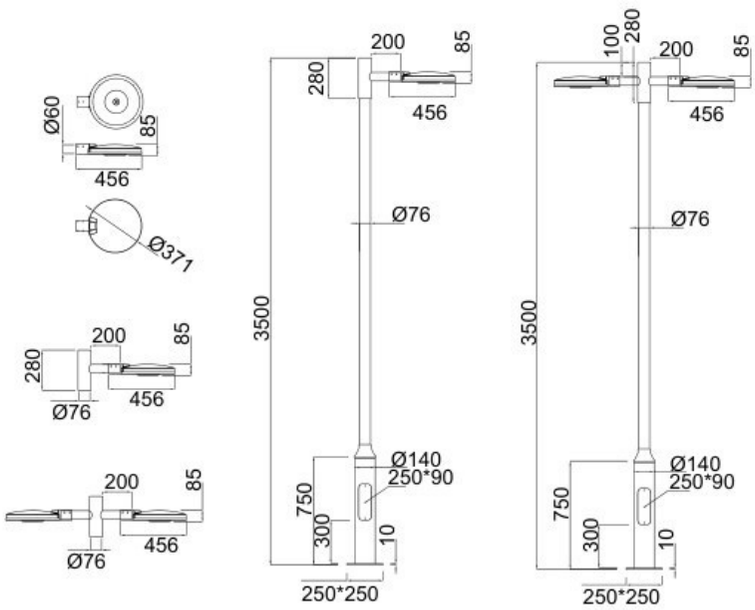


Description:


Die-cast Aluminum housing

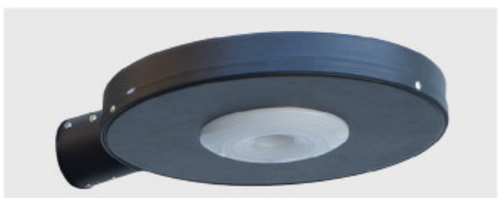






No: LP261071-25W LED
Lumileds LED 25W
Opal PC
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	238.8	869.7	3.08
2	59.7	217.4	6.16
3	26.5	96.6	9.25
4	14.9	54.4	12.33
5	9.6	34.8	15.41

No: LP261071-35W LED
Lumileds LED 35W 3087lm
Opal PC
116º
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	456	1770.0	3.21
2	114.1	442.6	6.42
3	50.7	196.7	9.64
4	28.5	110.6	12.85
5	18.3	70.8	16.07

No: LP261071-60W LED
Lumileds LED 60W 5565lm
Opal PC
116º
Class I, IP65

LEDPRO


LP261041

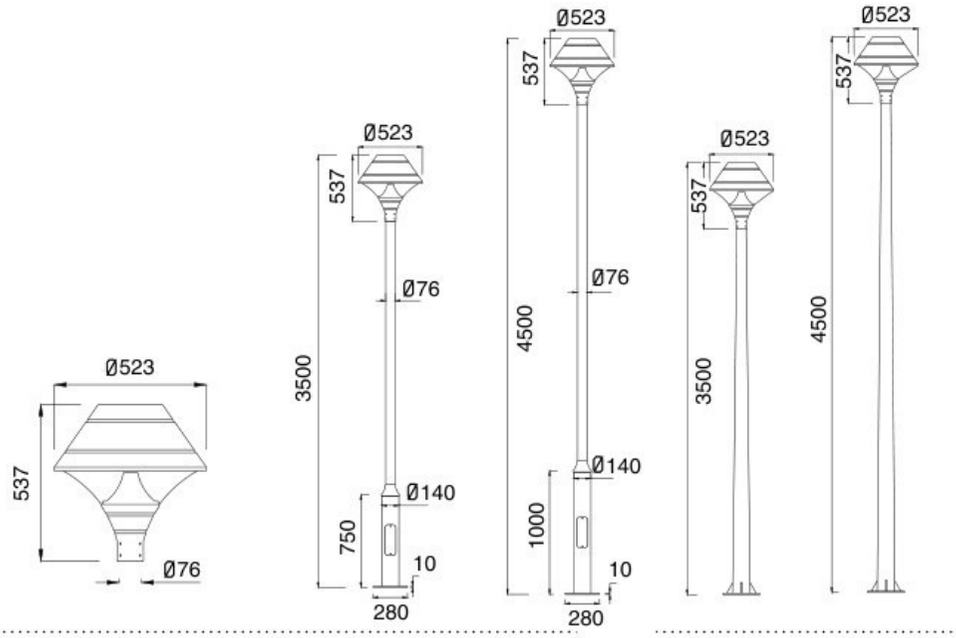

Description:

Sanding-cast Aluminum housing

Spinning Aluminum Top Cover



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	132	517.7	3.60
2	33.0	129.4	7.21
3	14.7	57.5	10.82
4	8.2	32.4	14.43
5	5.3	20.7	18.04

No: LP261041-25W LED


Lumileds LED 25W 1530lm

Clear PC

122.02º

Class I, IP65





H(m)	Eavg(lx)	Emax(lx)	D(m)
1	797	1546.0	1.27
2	199.4	386.5	2.54
3	88.6	171.8	3.82
4	49.8	96.6	5.09
5	31.9	61.8	6.37

No: LP261041-35W LED

Lumileds LED 35W 2167lm

Clear PC

Class I, IP65

No: LP261041-60W LED

Lumileds LED 60W

Clear PC

Class I, IP65

No: LP261041-E27

E27 CFL Max. 45W


Clear PC

Class I, IP65



LEDPRO

LP261044

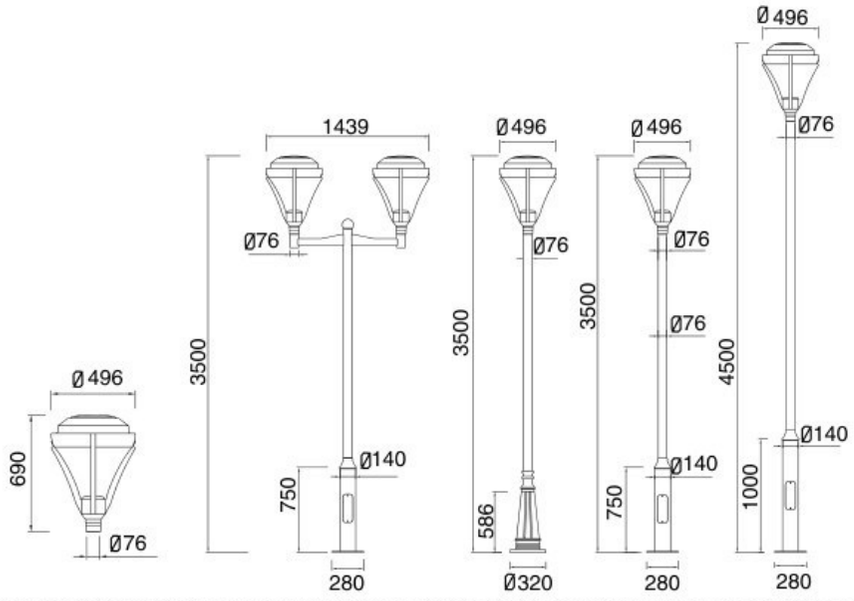




Description:

Die-cast Aluminum housing;


Spinning Aluminum Top Cover



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	311.3	1150.0	3.26
2	77.8	287.6	6.52
3	34.6	127.8	9.79
4	19.5	71.9	13.05
5	12.5	46.0	16.31


No: LP261044-30W LED
Lumileds LED 30W 2785lm
Clear Glass
116.97º
Class I, IP65





H(m)	Eavg(lx)	Emax(lx)	D(m)
1	436.2	1496.0	3.30
2	109.1	374.0	6.60
3	48.5	166.2	9.90
4	27.3	93.5	13.19
5	17.5	59.8	16.49

No: LP261044-45W LED
Lumileds LED 45W 3943lm
Clear Glass
117.54º
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	530.7	1824.0	3.29
2	132.7	455.9	6.57
3	59.0	202.6	9.86
4	33.2	114.0	13.15
5	21.2	73.0	16.44


No: LP261044-60W LED
Lumileds LED 60W 4799lm
Clear Glass
117.36º
Class I, IP65

No: LP261044-E27
E27 CFL Max. 65W
Opal PC
Class I, IP65

LEDPRO

LP261046



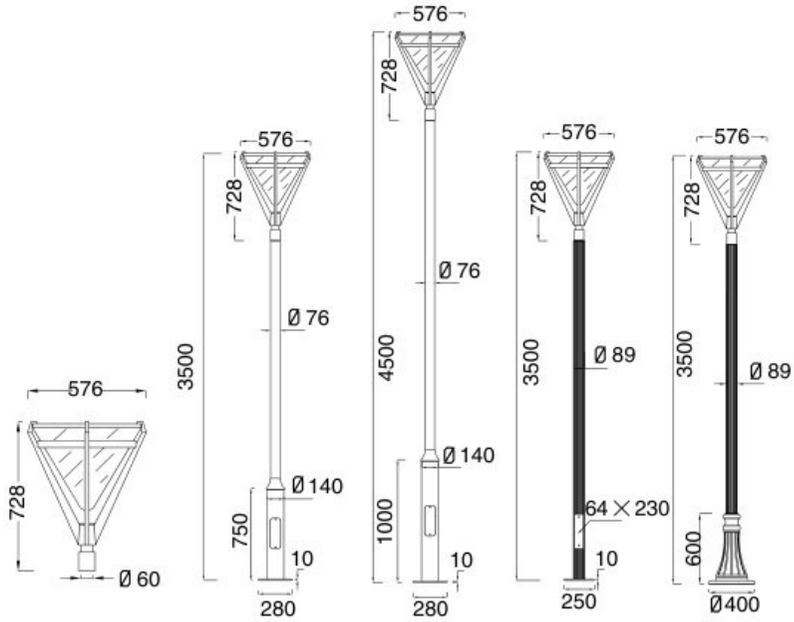


Description:

Die-cast Aluminum housing;

Spinning Aluminum Top Cover

No: LP261046-E27
E27 CFL Max. 65W
Clear PC
Class I, IP65




LP261046-E27



LP261046-LED

No: LP261046-25W LED
Lumileds LED 25W
Clear PC
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	43.2	545.8	7.13
2	10.8	136.4	14.27
3	4.8	60.6	21.41
4	2.7	34.1	28.55
5	1.7	21.8	35.69


No: LP261046-30W LED
Lumileds LED 30W 2106lm
Clear PC
148º
Class I, IP65

No: LP261046-60W LED
Lumileds LED 60W
Clear PC
Class I, IP65

LEDPRO

LP261055



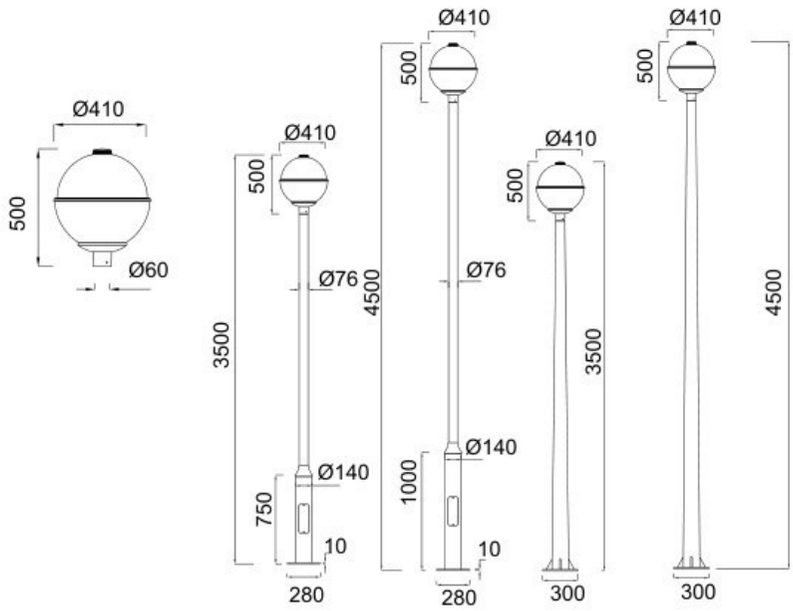


Description:

Die-cast Aluminum housing

Spinning Aluminum Top Cover






H(m)	Eavg(lx)	Emax(lx)	D(m)
1	166	236	2
2	41.5	59.0	4
3	18.5	26.2	6
4	10.4	14.8	8
5	6.6	9.4	10

No: LP261055-25W LED

Lumileds LED 25W 1295lm

Ribbed Clear PC

Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	228	327	2
2	56.9	81.6	4
3	25.3	36.3	6
4	14.2	20.4	8
5	9.1	13.1	10

No: LP261055-35W LED

Lumileds LED 35W 1777lm

Ribbed Clear PC

Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	562	844	2.00
2	140.4	210.9	4.00
3	62.4	93.7	6.00
4	35.1	52.7	8.00
5	22.5	33.8	10.00

No: LP261055-60W LED

Lumileds LED 60W 3582lm

Ribbed Clear PC

90º

Class I, IP65

No: LP261055-E27


E27 CFL Max.65w

Ribbed Clear PC

Class I, IP44

LEDPRO

LP261056

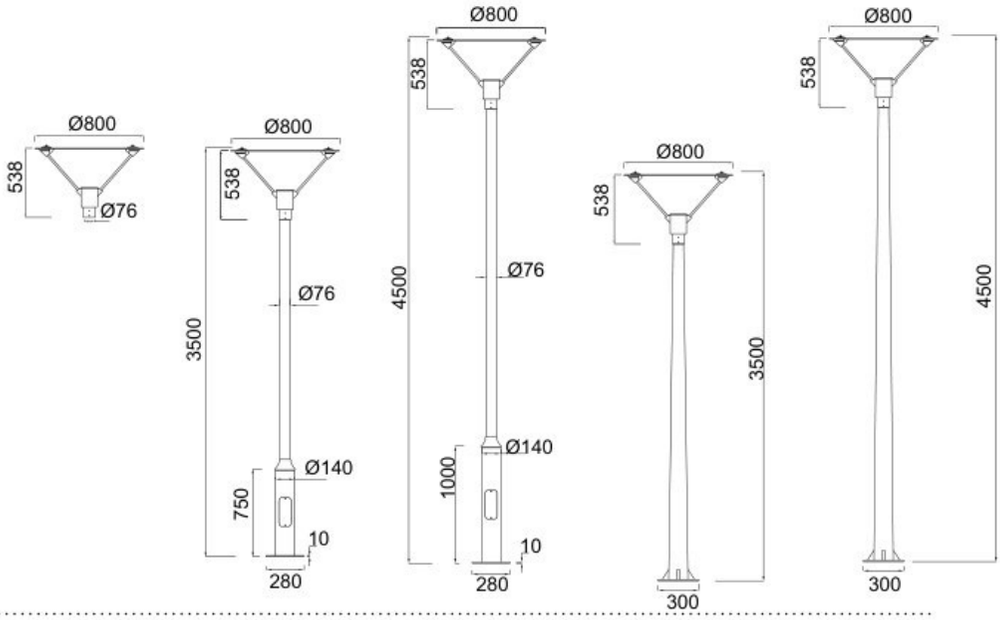


Description:

Die-cast Aluminum housing

Top Aluminium sheet reflector system

No: LP261056-G12 70W
G12, 70W HID
Clear Glass
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	112	528	0.40
2	27.9	132.1	0.81
3	12.4	58.7	12.11
4	7.0	33.0	16.15
5	4.5	21.1	20.19


No: LP261056-30W LED
Lumileds LED 30W 2313lm
Clear Glass
127º
Class I, IP65






LEDPRO

LP261065

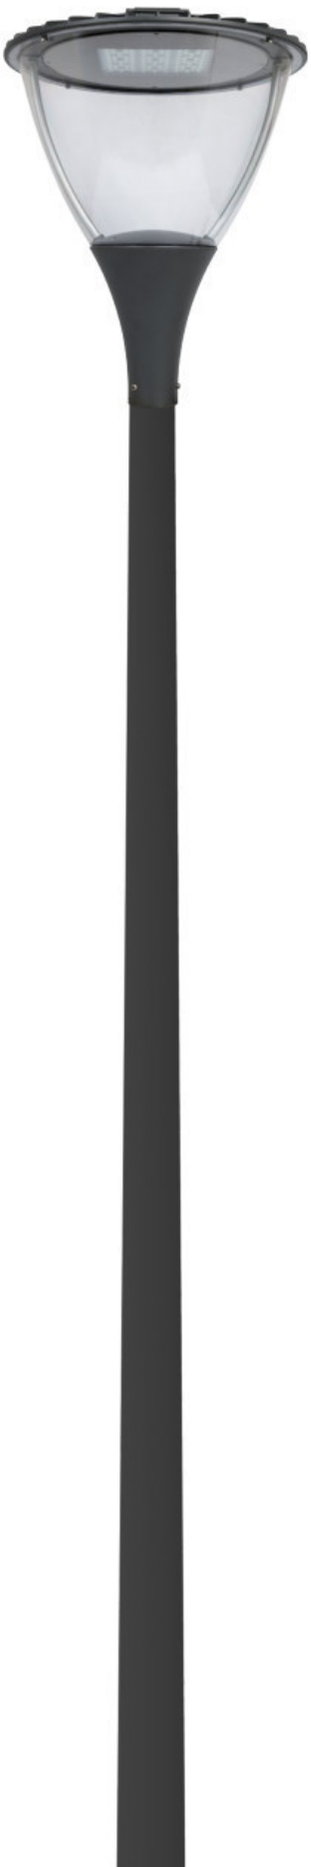

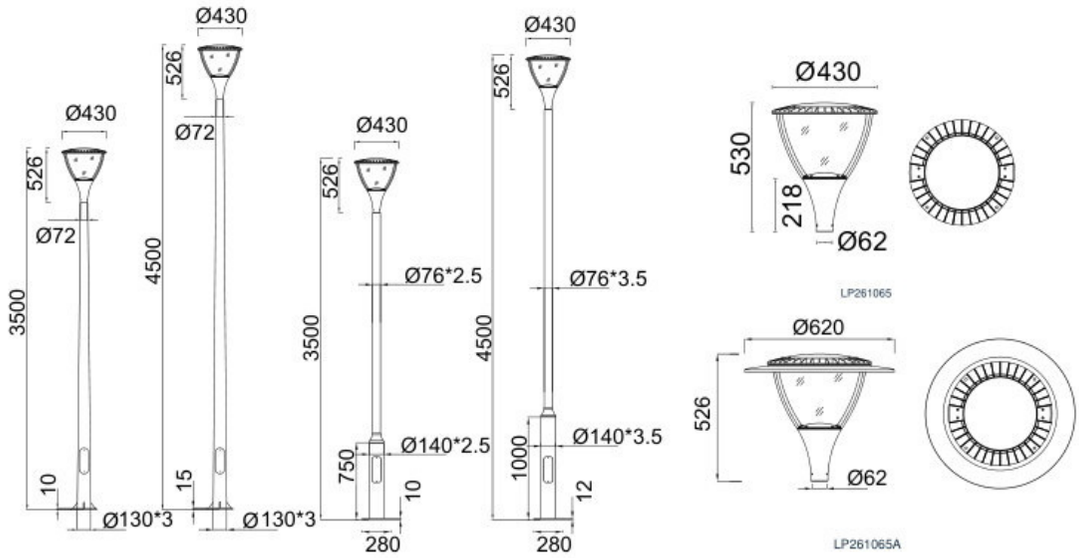

Description:

Die-cast Aluminum housing





LP261065



LEDPRO


LP261066

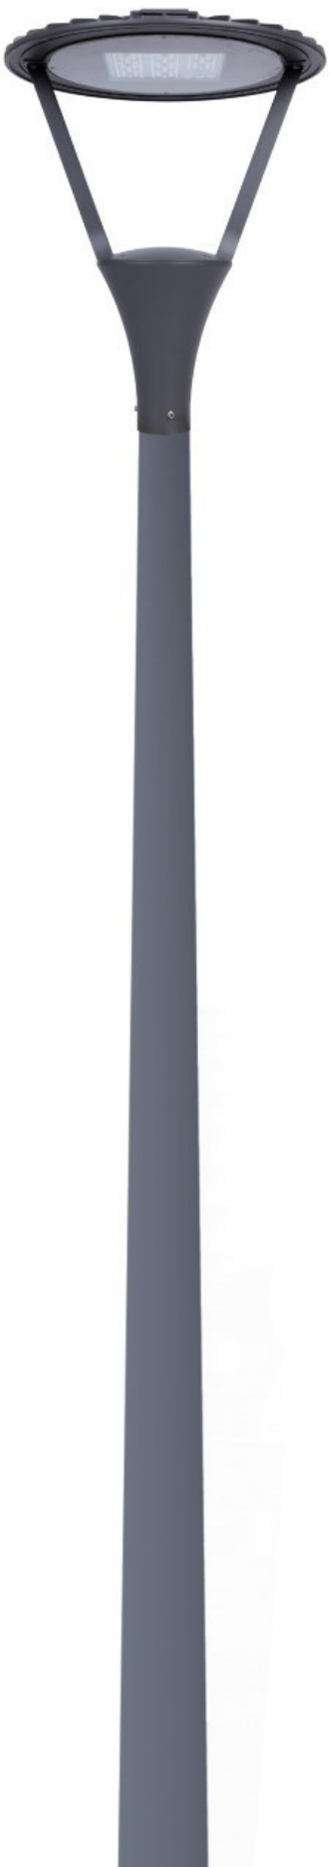

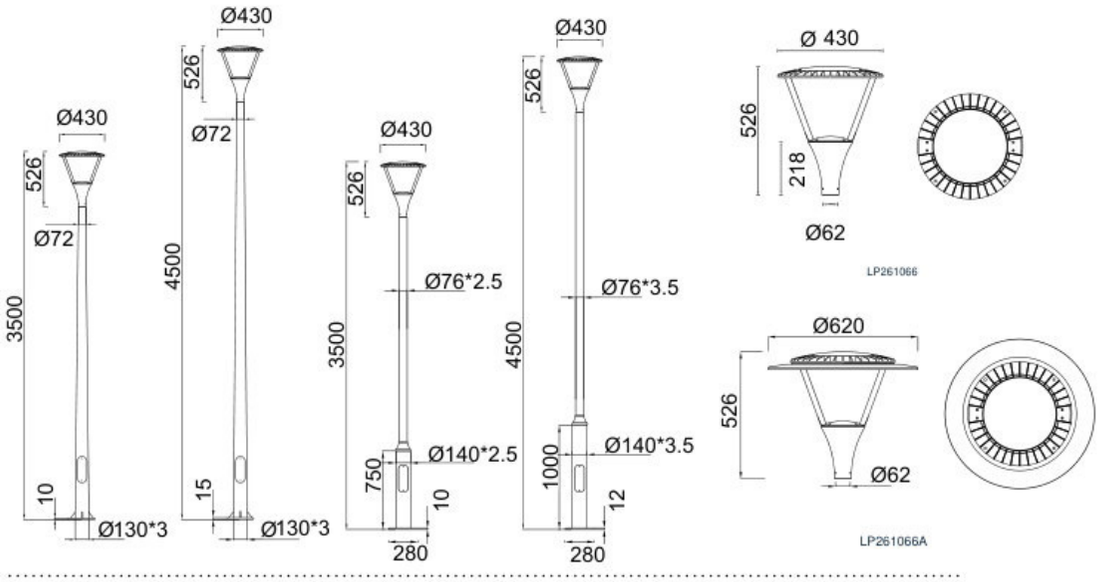

Description:

Die-cast Aluminum housing

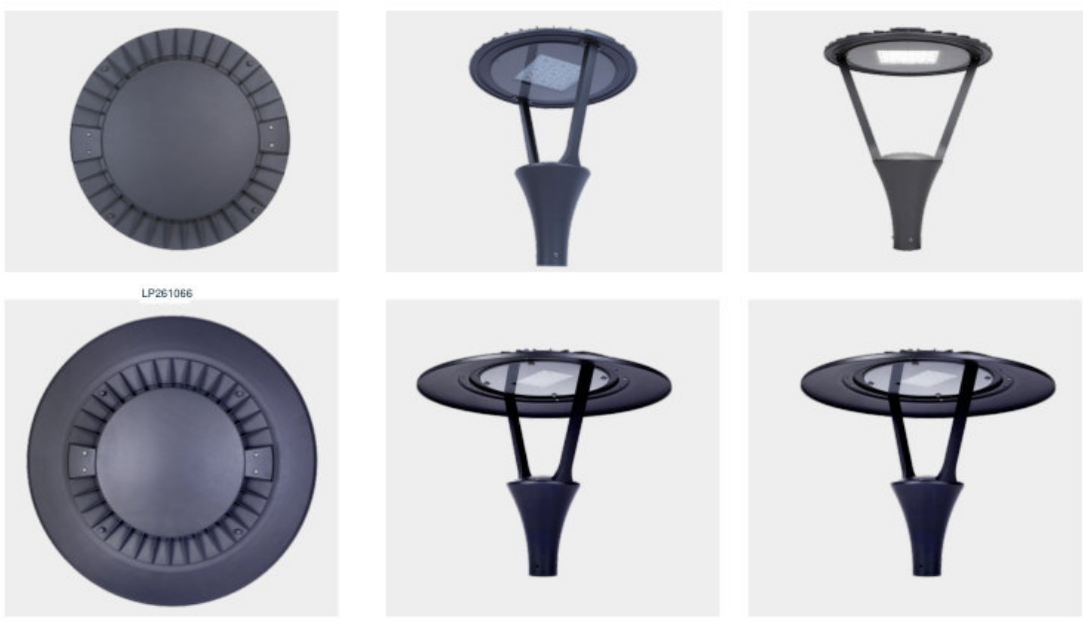

LEDPRO


LP261065-photometry



Symmetrical




Asymmetrical




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	719.4	1082.0	2.00
2	179.8	270.6	4.00
3	79.9	120.3	6.00
4	45.0	67.7	8.00
5	28.8	43.3	10.00

No: LP261065-30W LED S
Lumileds LED 30W 2909lm
Clear PC
90º symmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	243.7	402.6	0.75
2	60.9	100.6	1.51
3	27.1	44.7	2.27
4	15.2	25.2	3.02
5	9.7	16.1	3.78

No: LP261065-30W LED A
Lumileds LED 30W 2970lm
Clear PC
41º asymmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	1251	1887.0	2.00
2	312.9	471.8	4.00
3	139.0	209.7	6.00
4	78.2	117.9	8.00
5	50.1	75.5	10.00

No: LP261065-55W LED S
Lumileds LED 55W 5065lm
Clear PC
90º symmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	426.9	723.0	0.74
2	106.7	180.8	1.48
3	47.4	80.3	2.22
4	26.7	45.2	2.97
5	17.1	28.9	3.71

No: LP261065-55W LED A
Lumileds LED 55W 5171lm
Clear PC
41º asymmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	1611	2594.0	2.00
2	402.8	648.4	4.00
3	179.0	288.2	6.00
4	100.7	162.1	8.00
5	64.5	103.7	10.00

No: LP261065-80W LED S
Lumileds LED 80W 6864lm
Clear PC
90º symmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	604.0	1161.0	0.79
2	151.0	290.2	1.58
3	67.1	129.0	2.38
4	37.8	72.5	3.17
5	24.2	46.4	3.96

No: LP261065-80W LED A
Lumileds LED 80W 6808lm
Clear PC
43º asymmetrical
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	1873	3020.0	2.00
2	468.3	754.9	4.00
3	208.1	335.5	6.00
4	117.1	188.7	8.00
5	74.9	120.8	10.00

No: LP261065-100W LED S
Lumileds LED 100W 7990lm
Clear PC
90º symmetrical
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	727.9	1447.0	0.79
2	182.0	361.7	1.58
3	80.9	160.8	2.38
4	45.5	90.4	3.17
5	29.1	57.9	3.96

No: LP261065-100W LED A
Lumileds LED 100W 8168lm
Clear PC
43º asymmetrical
Class I, IP65

LEDPRO


LP261066-photometry



Symmetrical




Asymmetrical




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	789.3	1245.0	2.00
2	197.3	311.2	4.00
3	87.7	138.3	6.00
4	49.3	77.8	8.00
5	31.6	49.8	10.00

No: LP261066-30W LED S
Lumileds LED 30W 2924lm
Clear Glass
90º symmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	154.6	293.2	0.73
2	38.7	73.3	1.46
3	17.2	32.6	2.20
4	9.7	18.3	2.93
5	6.2	11.7	3.66

No: LP261066-30W LED A
Lumileds LED 30W 2842lm
Clear Glass
40º asymmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	1376	2166.0	2.00
2	344.0	541.4	4.00
3	152.9	240.6	6.00
4	86.0	135.3	8.00
5	55.0	86.6	10.00

No: LP261066-55W LED S
Lumileds LED 55W 5101lm
Clear Glass
90º symmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	269.8	509.9	0.73
2	67.4	127.5	1.46
3	30.0	56.7	2.20
4	16.9	31.9	2.93
5	10.8	20.4	3.66

No: LP261066-55W LED A
Lumileds LED 55W 4949lm
Clear Glass
40º asymmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	1819	2838.0	2.00
2	454.6	709.4	4.00
3	202.1	315.3	6.00
4	113.7	177.4	8.00
5	72.7	113.5	10.00

No: LP261066-80W LED S
Lumileds LED 80W 6759lm
Clear Glass
90º symmetrical
Class I, IP65




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	348.9	619.0	0.71
2	87.2	154.8	1.42
3	38.8	68.8	2.13
4	21.8	38.7	2.85
5	14.0	24.8	3.56

No: LP261066-80W LED A
Lumileds LED 80W 6439lm
Clear Glass s
40º asymmetrical
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	2168	3408.0	2.00
2	542.0	852.1	4.00
3	240.9	378.7	6.00
4	135.5	213.0	8.00
5	86.7	136.3	10.00


No: LP261066-100W LED S
Lumileds LED 100W 8056lm
Clear Glass
90º symmetrical
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	411.8	732.5	0.71
2	103.0	183.1	1.42
3	45.8	81.4	2.13
4	25.7	45.8	2.84
5	16.5	29.3	3.56


No: LP261066-100W LED A
Lumileds LED 100W 7601lm
Clear Glass
40º asymmetrical
Class I, IP65



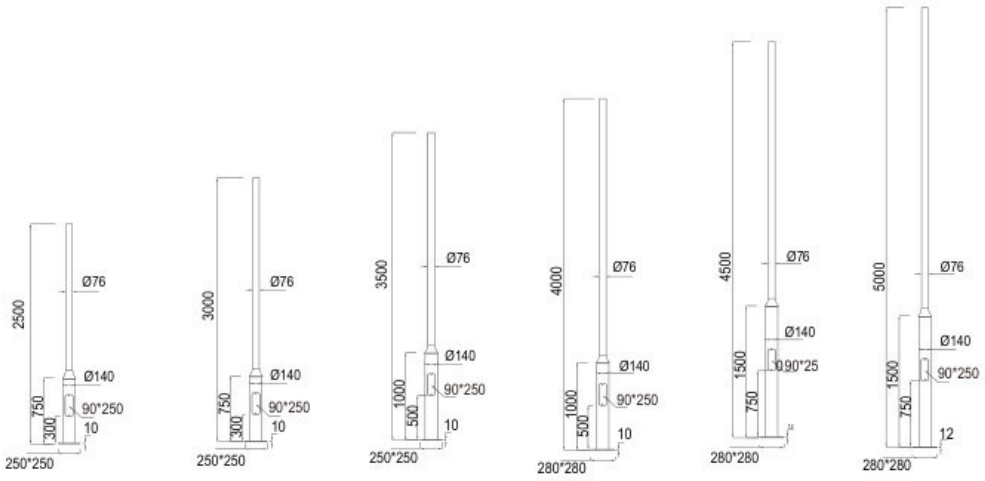

Hot-galvanised steel Tapered Poles

Item no.	Pole Diameter (Upper +Lower Pole)	Total Height	Lower pole Height	Thickness (Upper +Lower Pole)	Door size	H from ground of door	Base plate
LP26001G-2.5m	Φ140+Φ76	2500	750	2.5/2.5	90x250	300	250x250x10
LP26001G-3m	Φ140+Φ76	3000	750	2.5/2.5	90x250	300	250x250x10
LP26001G-3.5m	Φ140+Φ76	3500	1000	2.5/2.5	90x250	500	250x250x10
LP26001G-4m	Φ140+Φ76	4000	1000	2.5/2.5	90x250	500	280x280x10
LP26001G-4.5m	Φ140+Φ76	4500	1500	2.75/2.75	90x250	750	280x280x12
LP26001G-5m	Φ140+Φ76	5000	1500	3/3	90x250	750	280x280x12

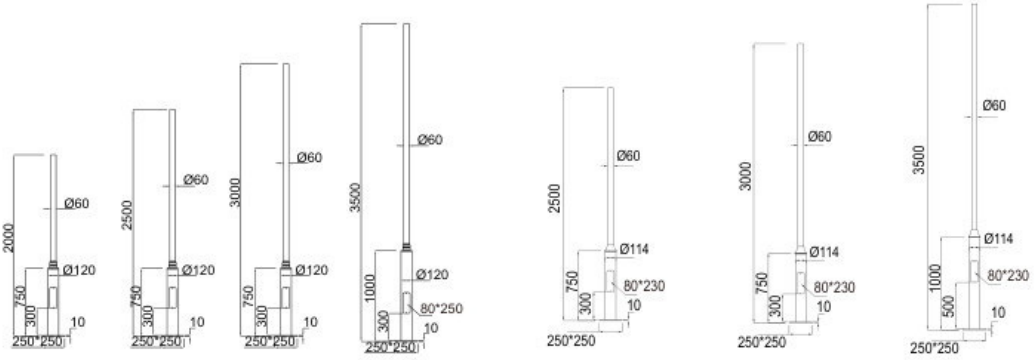


Extruded Aluminium Tapered Poles

Item no.	Pole Diameter (Upper +Lower Pole)	Total Height	Lower pole Height	Thickness (Upper +Lower Pole)	Door size	H from ground of door	Base plate
LP26002-2m	Φ120+Φ60	2000	750	2.0/2.0	80x230	300	250x250x10
LP26002-2.5m	Φ120+Φ60	2500	750	2.0/2.0	80x230	300	250x250x10
LP26002-3m	Φ120+Φ60	3000	750	2.0/2.0	80x230	300	250x250x10
LP26002-3.5m	Φ120+Φ60	3500	1000	2.0/2.0	80x230	300	250x250x10

Hot-galvanised steel Tapered Poles


Item no.	Pole Diameter (Upper +Lower Pole)	Total Height	Lower pole Height	Thickness (Upper +Lower Pole)	Door size	H from ground of door	Base plate
LP26002G-2.5m	Φ114+Φ60	2500	750	2.5/2.5	80x230	300	250x250x10
LP26002G-3m	Φ114+Φ60	3000	750	2.5/2.5	80x230	300	250x250x10
LP26002G-3.5m	Φ114+Φ60	3500	1000	2.5/2.5	80x230	500	250x250x10

New Aluminum Pole, saving shipping cost

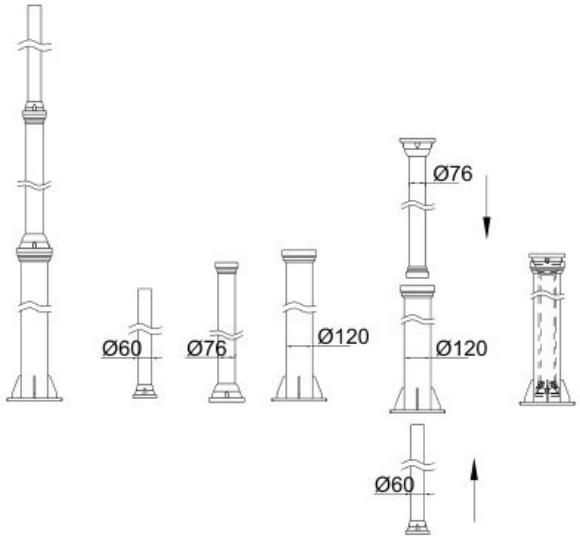






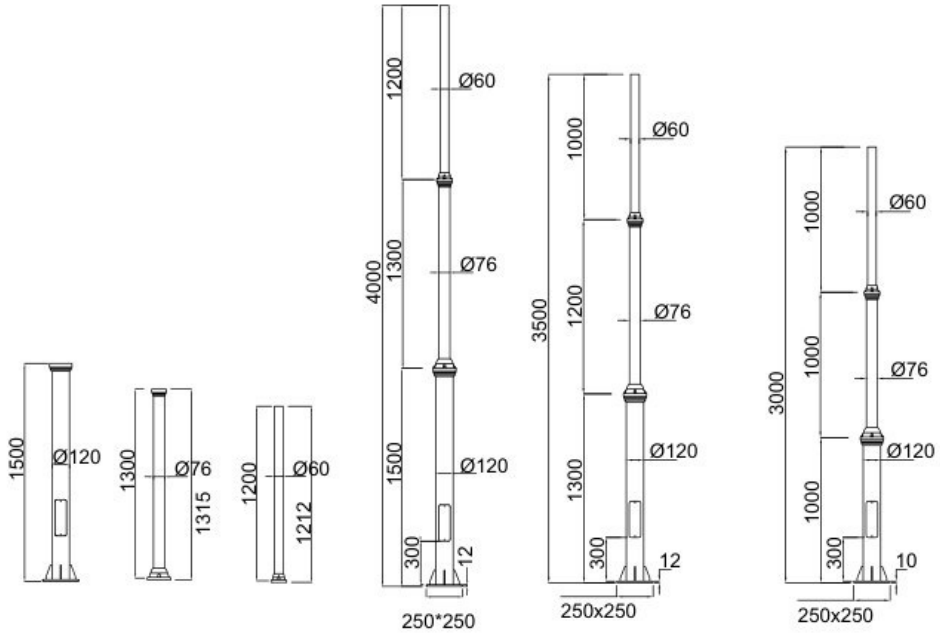

Extruded Aluminium Tapered Poles


Item no.	Pole Diameter (Upper +Lower Pole)	Total Height	Lower pole Height	Thickness (Upper +Lower Pole)	Door size	H from ground of door	Base plate
LP26004-3m	Φ120+Φ76+Φ60	3000	1000	2.5/3.0/3.0	80x250	300	250x250x10
LP26004-3.5m	Φ120+Φ76+Φ60	3500	1300	2.5/3.0/3.0	80x250	300	250x250x10
LP26004-4m	Φ120+Φ76+Φ60	4000	1500	2.5/3.0/3.0	80x250	300	250x250x10



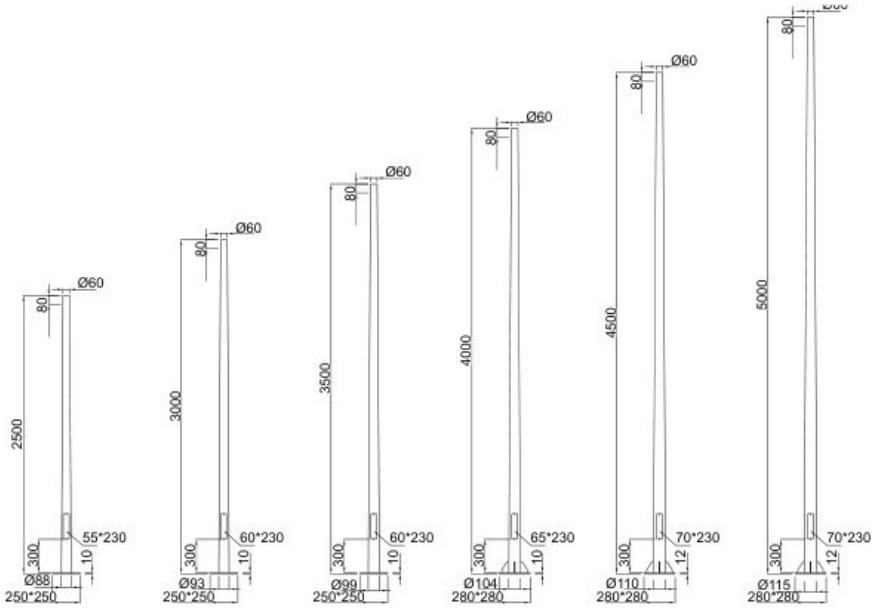


Aluminum Conical Poles

Item no.	Total Height	Base diameter	Head diameter	Thickness	Door size	H from ground of door	Base plate
LP26011-2.5m	2500	Φ88	Φ60	3.0	55x230	300	250x250x10
LP26011-3m	3000	Φ93	Φ60	3.0	60x230	300	250x250x10
LP26011-3.5m	3500	Φ99	Φ60	3.0	60x230	300	250x250x10
LP26011-4m	4000	Φ104	Φ60	3.0	65x230	300	280x280x10
LP26011-4.5m	4500	Φ110	Φ60	3.0	70x230	300	280x280x12
LP26011-5m	5000	Φ115	Φ60	3.0	70x230	300	280x280x12

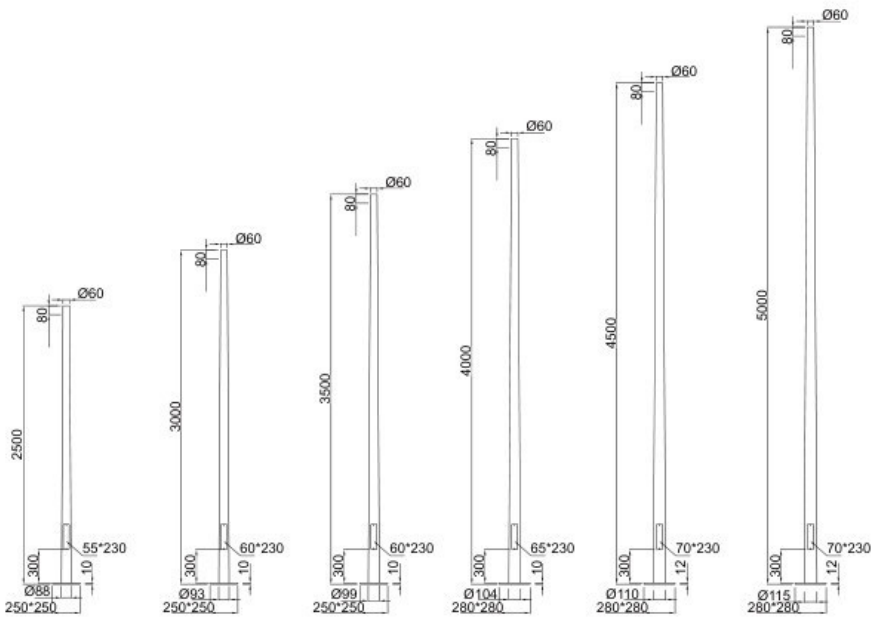


Hot-galvanised steel Conical Poles

Item no.	Total Height	Base diameter	Head diameter	Thickness	Door size	H from ground of door	Base plate
LP26011G-2.5m	2500	Φ88	Φ60	2.75	55x230	300	250x250x10
LP26011G-3m	3000	Φ93	Φ60	2.75	60x230	300	250x250x10
LP26011G-3.5m	3500	Φ99	Φ60	2.75	60x230	300	250x250x10
LP26011G-4m	4000	Φ104	Φ60	2.75	65x230	300	280x280x10
LP26011G-4.5m	4500	Φ110	Φ60	2.75	70x230	300	280x280x12
LP26011G-5m	5000	Φ115	Φ60	3.0	70x230	300	280x280x12

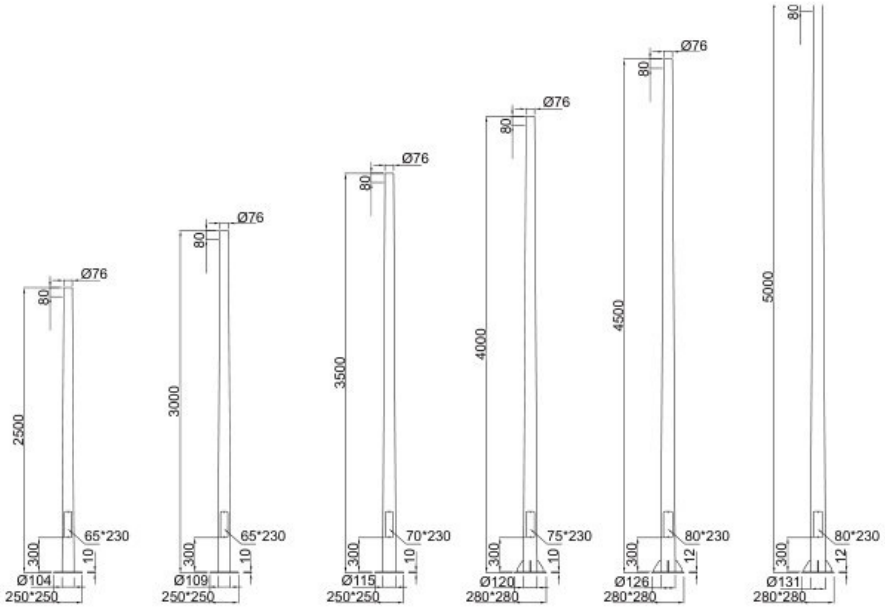

Aluminum Conical Poles

Item no.	Total Height	Base diameter	Head diameter	Thickness	Door size	H from ground of door	Base plate
LP26012-2.5m	2500	Φ104	Φ76	3.0	65x230	300	250x250x10
LP26012-3m	3000	Φ109	Φ76	3.0	65x230	300	250x250x10
LP26012-3.5m	3500	Φ115	Φ76	3.0	70x230	300	250x250x10
LP26012-4m	4000	Φ120	Φ76	3.0	75x230	300	280x280x10
LP26012-4.5m	4500	Φ126	Φ76	3.0	80x230	300	280x280x12
LP26012-5m	5000	Φ131	Φ76	3.0	80x230	300	280x280x12

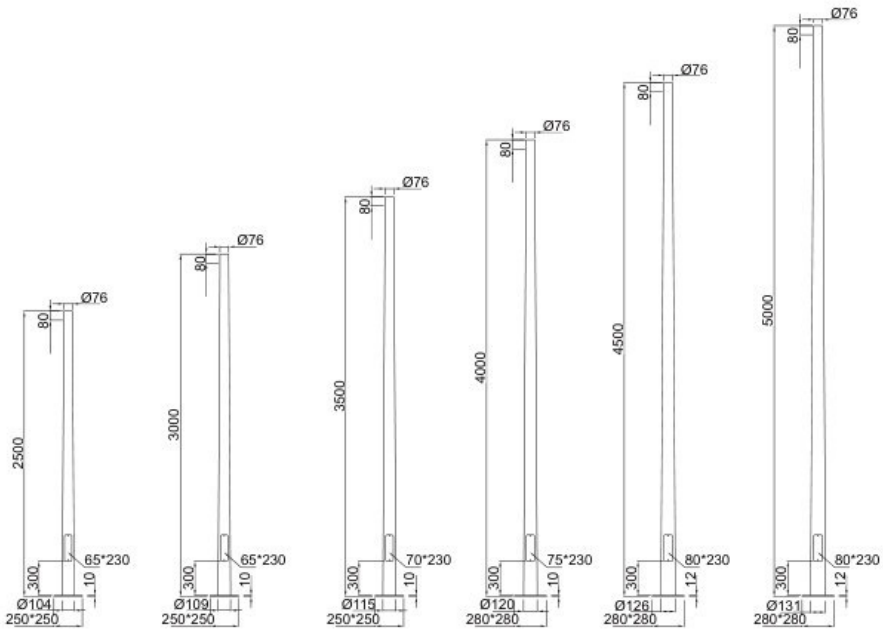


Hot-galvanised steel Conical Poles

Item no.	Total Height	Base diameter	Head diameter	Thickness	Door size	H from ground of door	Base plate
LP26012G-2.5m	2500	Φ104	Φ76	2.75	65x230	300	250x250x10
LP26012G-3m	3000	Φ109	Φ76	2.75	65x230	300	250x250x10
LP26012G-3.5m	3500	Φ115	Φ76	2.75	70x230	300	250x250x10
LP26012G-4m	4000	Φ120	Φ76	2.75	75x230	300	280x280x10
LP26012G-4.5m	4500	Φ126	Φ76	2.75	80x230	300	280x280x12
LP26012G-5m	5000	Φ131	Φ76	3.0	80x230	300	280x280x12






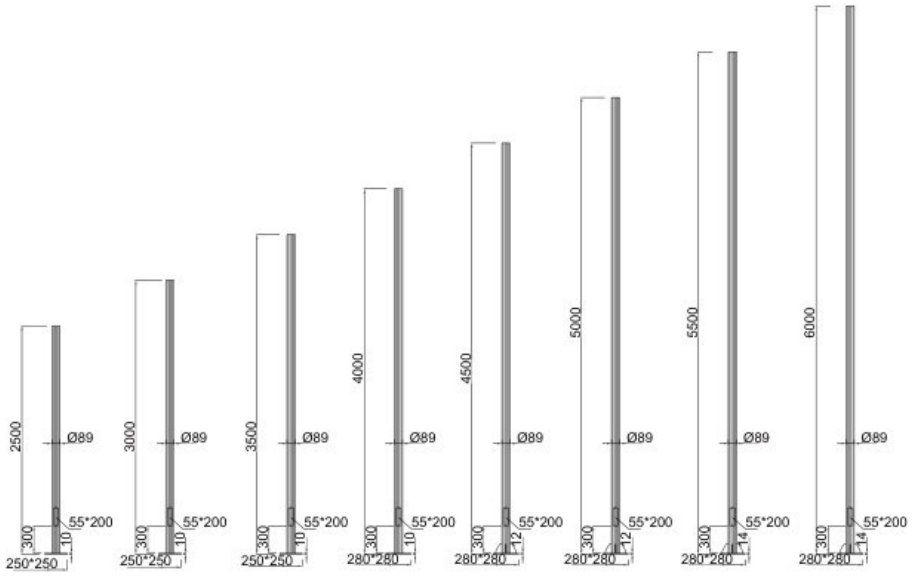

Extruded Aluminum(with ribs) Cylindrical poles


Item no.	Total Height	Pole diameter	Thickness	Door size	H from ground of door	Base plate
021-2.5m	2500	Φ89	2.5	55x200	300	250x250x10
021-3m	3000	Φ89	2.5	55x200	300	250x250x10
021-3.5m	3500	Φ89	2.5	55x200	300	250x250x10
021-4m	4000	Φ89	2.5	55x200	300	280x280x10
021-4.5m	4500	Φ89	2.5	55x200	300	280x280x12
021-5m	5000	Φ89	3.5	55x200	300	280x280x12
021-5.5m	5500	Φ89	3.5	55x200	300	280x280x14
021-6m	6000	Φ89	3.5	55x200	300	280x280x14



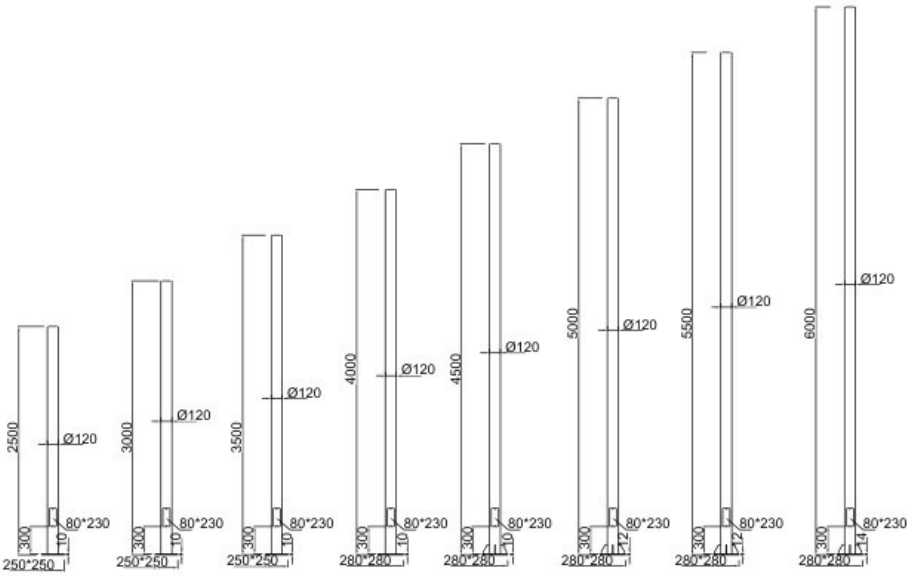


Extruded Aluminum Cylindrical poles

Item no.	Total Height	Pole diameter	Thickness	Door size	H from ground of door	Base plate
022-2.5m	2500	Φ120	2.0	80x230	300	250x250x10
022-3m	3000	Φ120	2.0	80x230	300	250x250x10
022-3.5m	3500	Φ120	2.0	80x230	300	250x250x10
022-4m	4000	Φ120	2.0	80x230	300	280x280x10
022-4.5m	4500	Φ120	2.0	80x230	300	280x280x10
022-5m	5000	Φ120	3.0	80x230	300	280x280x12
022-5.5m	5500	Φ120	3.0	80x230	300	280x280x12
022-6m	6000	Φ120	3.0	80x230	300	280x280x14

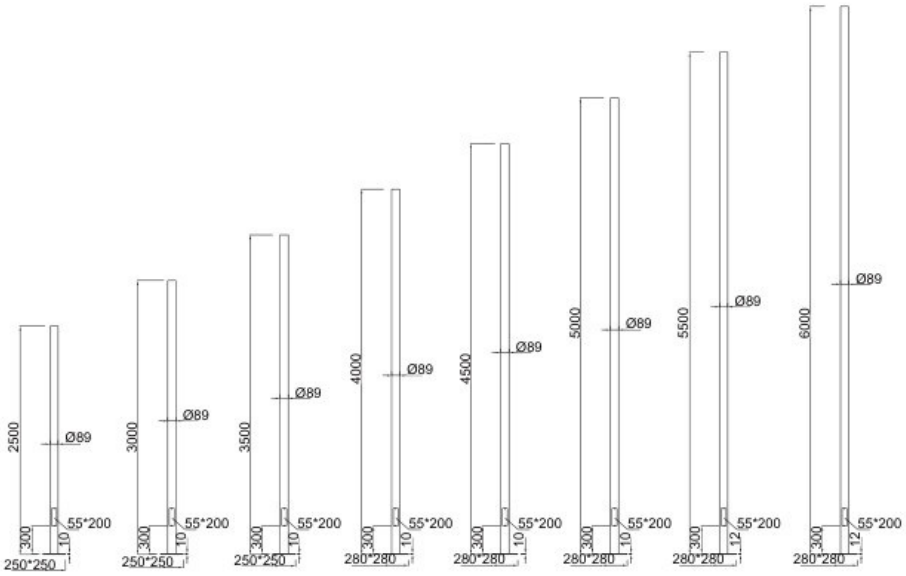

Hot-galvanised steel Cylindrical poles

Item no.	Total Height	Pole diameter	Thickness	Door size	H from ground of door	Base plate
021G-2.5m	2500	Φ89	2.5	55x200	300	250x250x10
021G-3m	3000	Φ89	2.5	55x200	300	250x250x10
021G-3.5m	3500	Φ89	2.5	55x200	300	250x250x10
021G-4m	4000	Φ89	2.5	55x200	300	280x280x10
021G-4.5m	4500	Φ89	2.5	55x200	300	280x280x12
021G-5m	5000	Φ89	3.0	55x200	300	280x280x12
021G-5.5m	5500	Φ89	3.0	55x200	300	280x280x14
021G-6m	6000	Φ89	3.0	55x200	300	280x280x14

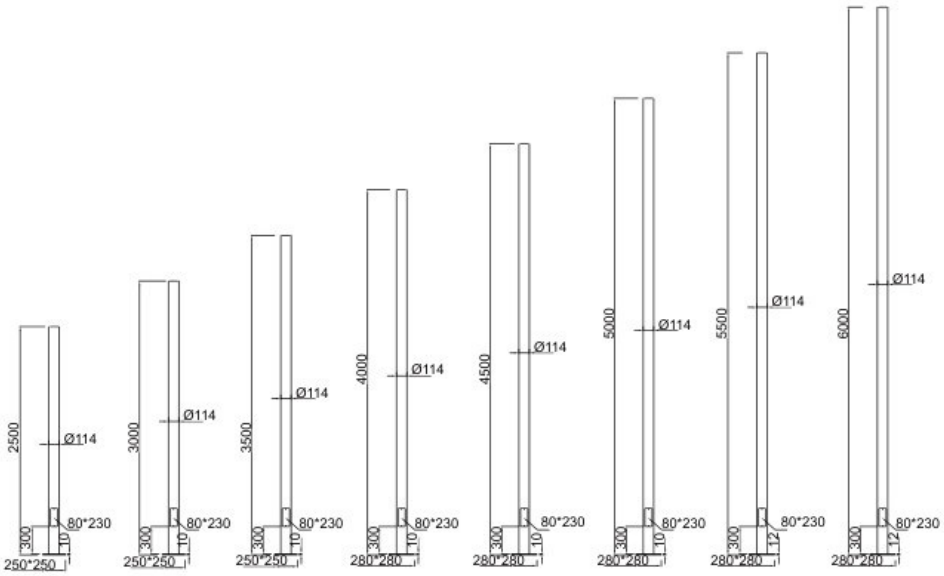

Hot-galvanised steel Cylindrical poles

Item no.	Total Height	Pole diameter	Thickness	Door size	H from ground of door	Base plate
022G-2.5m	2500	Φ114	2.5	80x230	300	250x250x10
022G-3m	3000	Φ114	2.5	80x230	300	250x250x10
022G-3.5m	3500	Φ114	2.5	80x230	300	250x250x10
022G-4m	4000	Φ114	2.5	80x230	300	280x280x10
022G-4.5m	4500	Φ114	2.5	80x230	300	280x280x10
022G-5m	5000	Φ114	3.0	80x230	300	280x280x10
022G-5.5m	5500	Φ114	3.0	80x230	300	280x280x12
022G-6m	6000	Φ114	3.0	80x230	300	280x280x12





Sanding cast base and Extruded Alumium Pole

Item no.	Total Height	Pole diameter	Thickness	Base size
LP26051-2.5m	2500	Φ76	2.5	Φ320x568
LP26051-3m	3000	Φ76	2.5	Φ320x568
LP26051-3.5m	3500	Φ76	2.5	Φ320x568




Sanding cast base and Extruded Alumium Pole

Item no.	Total Height	Pole diameter	Thickness	Base size
LP26052-2.5m	2500	Φ76	2.5	Φ210x380
LP26052-3m	3000	Φ76	2.5	Φ210x380
LP26052-3.5m	3500	Φ76	2.5	Φ210x380



Sanding cast base and Extruded Alumium Pole

Item no.	Total Height	Pole diameter	Thickness	Base size
LP26053-2.5m	2500	Φ89	2.5	Φ400x700
LP26053-3m	3000	Φ89	2.5	Φ400x700
LP26053-3.5m	3500	Φ89	2.5	Φ400x700

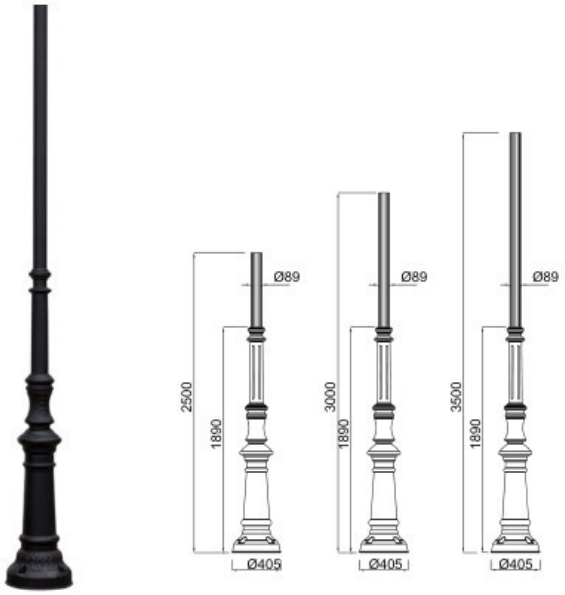

Sanding cast base and Extruded Alumium Pole

Item no.	Total Height	Pole diameter	Thickness	Base size
LP26054-2.5m	2500	Φ89	2.5	Φ405x1890
LP26054-3m	3000	Φ89	2.5	Φ405x1890
LP26054-3.5m	3500	Φ89	2.5	Φ405x1890

LP26055


See updated pole sheet for current dimensions.

Zie het bijgewerkte mastenblad voor de actuele maatvoering.


LP26055-2.5m
LP26055-3m
LP26055-3.5m

Knock-down installation kits







LP26RT100




LP26RT101

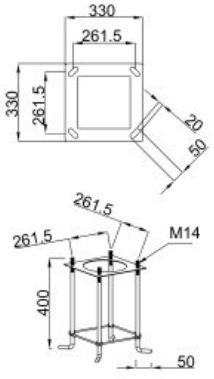


LP26RT102

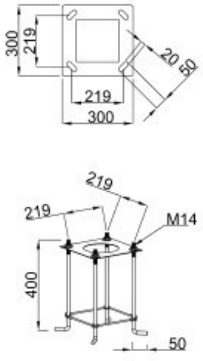


LP26RT103




LP26RT104




LP26RT105

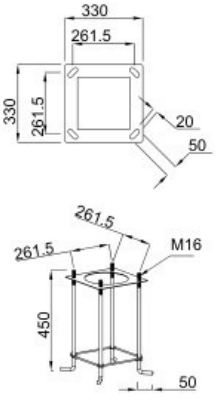

LP26RT106

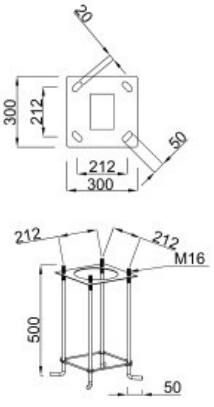


LP26RT107

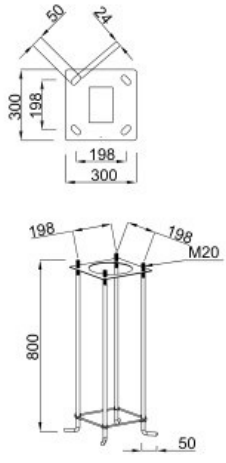

LP26RT108


Knock-down installation kits for bollards



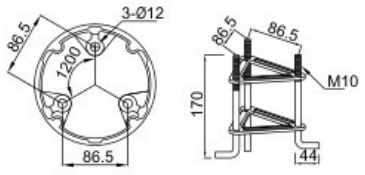


LP26RT001



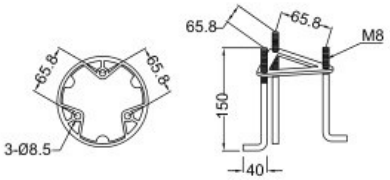


LP26RT002






LP26RT003


Sand-casting adaptor

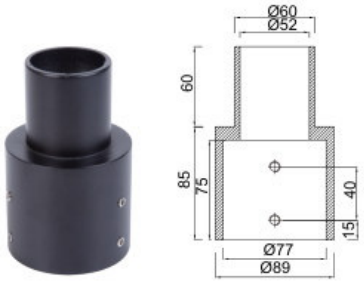

Φ60 To Φ76

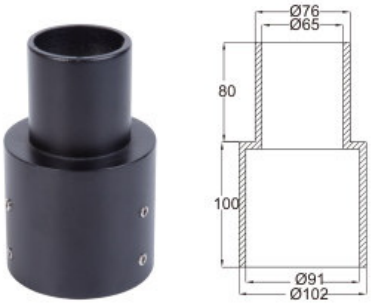

Φ76 To Φ89

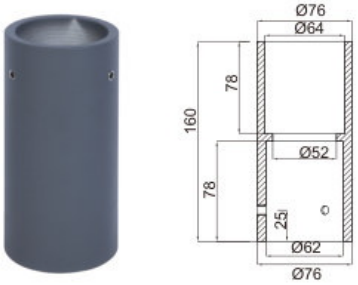

Φ76 To Φ60

Connection box



IP44




IP65




IP68



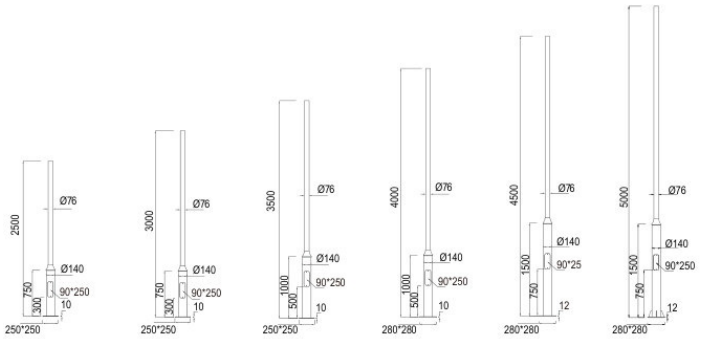

Hot-galvanised steel Tapered Poles

Item no.	Pole Diameter (Upper +Lower Pole)	Total Height	Lower pole Height	Thickness (Upper +Lower Pole)	Door size	H from ground of door	Base plate
LP26001G-2.5m	Φ140+Φ76	2500	750	2.5/2.5	90x250	300	250x250x10
LP26001G-3m	Φ140+Φ76	3000	750	2.5/2.5	90x250	300	250x250x10
LP26001G-3.5m	Φ140+Φ76	3500	1000	2.5/2.5	90x250	500	250x250x10
LP26001G-4m	Φ140+Φ76	4000	1000	2.5/2.5	90x250	500	280x280x10
LP26001G-4.5m	Φ140+Φ76	4500	1500	2.75/2.75	90x250	750	280x280x12
LP26001G-5m	Φ140+Φ76	5000	1500	3/3	90x250	750	280x280x12

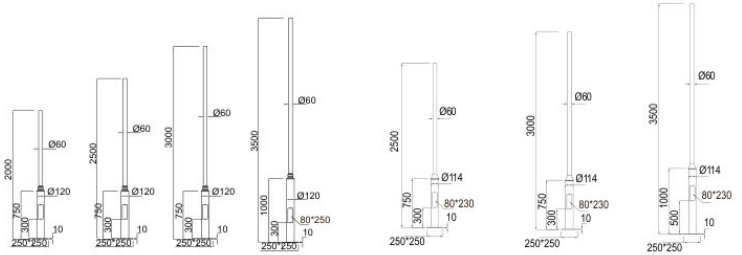


Extruded Aluminium Tapered Poles

Item no.	Pole Diameter (Upper +Lower Pole)	Total Height	Lower pole Height	Thickness (Upper +Lower Pole)	Door size	H from ground of door	Base plate
LP26002-2m	Φ120+Φ60	2000	750	2.0/2.0	80x230	300	250x250x10
LP26002-2.5m	Φ120+Φ60	2500	750	2.0/2.0	80x230	300	250x250x10
LP26002-3m	Φ120+Φ60	3000	750	2.0/2.0	80x230	300	250x250x10
LP26002-3.5m	Φ120+Φ60	3500	1000	2.0/2.0	80x230	300	250x250x10

Hot-galvanised steel Tapered Poles


Item no.	Pole Diameter (Upper +Lower Pole)	Total Height	Lower pole Height	Thickness (Upper +Lower Pole)	Door size	H from ground of door	Base plate
LP26002G-2.5m	Φ114+Φ60	2500	750	2.5/2.5	80x230	300	250x250x10
LP26002G-3m	Φ114+Φ60	3000	750	2.5/2.5	80x230	300	250x250x10
LP26002G-3.5m	Φ114+Φ60	3500	1000	2.5/2.5	80x230	500	250x250x10

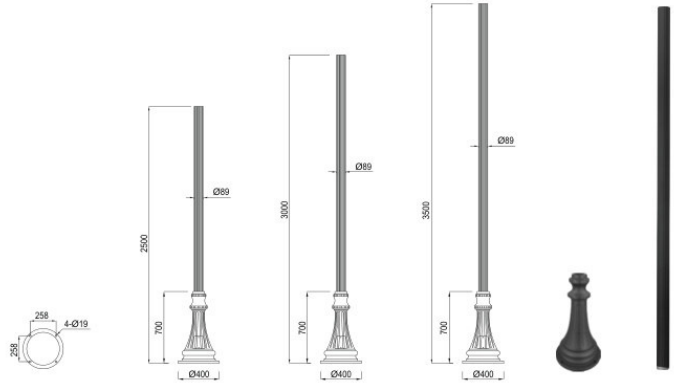

Sand-cast Aluminum Base and Extruded Alumium Pole

Item no.	Total Height	Pole diameter	Thickness	Base size
LP26053-2.5m	2500	Φ89	2.5	Ø400
LP26053-3m	3000	Φ89	2.5	Ø400
LP26053-3.5m	3500	Φ89	2.5	Ø400



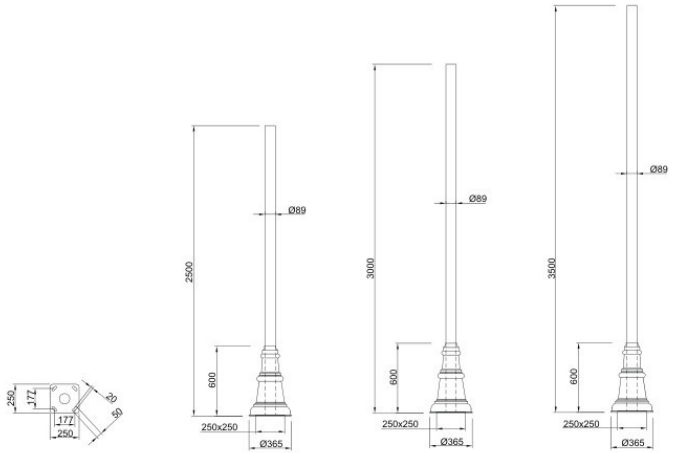

Sand-cast Aluminum Decorative Base, Extruded Alumium /Hot-galvanised steel poles

Item no.	Total Height	Lower Pole Height	Upper Pole diameter	Thickness	Base size
LP26055	2500	600	Ø89	2.5	Ø365
LP26055	3000	600	Ø89	2.5	Ø365
LP26055	3500	600	Ø89	2.5	Ø365

